

DCV BACKFLOW PREVENTER

SECTION N.T.S.

FOLLOWING INSTALLATION, THE BACKFLOW PREVENTION ASSEMBLY SHALL BE TESTED & CERTIFIED BY A LICENSED PLUMBER ENDORSED IN BACKFLOW PREVENTION MAINTENANCE TESTING & A BACKFLOW PREVENTION DEVICE MAINTENANCE TEST CERTIFICATE SHALL BE SUBMITTED TO MACKAY WATER'S BACKFLOW PREVENTION OFFICER WITHIN 14 DAYS.

VALVE BOX TABLE


DCV's DN	VALVE BOX TYPE	SIZE
20	STANDARD	14"x19"x12"
25	JUMBO	17"x23"x12"
32	BIG JUMBO	14"x30"x15"
40	SUPER JUMBO	20"x38"x17"
50	SUPER JUMBO	20"x38"x17"

ISSUE	AMENDMENT
B	ADJUST FROM BELOW TO ABOVE GROUND

DRAWING FILE NAME

ISTANDARD DRAWINGS\IRRIGATION\A4-00045.dwg

SIGNATURE DN FILE COPY
M.T.S.
J CLARKE, RPEQ 5625

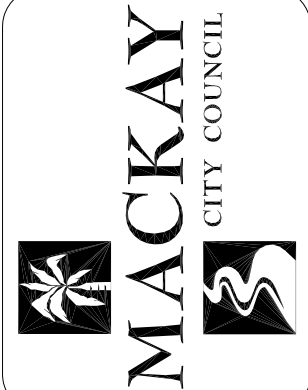

SCALE AS SHOWN
DRAWN DJAndrews
CHECKED K.White
DATE 11/01/07

DCV. BACKFLOW PREVENTER
DN 20-50 INSTALLATION DETAIL

DRAWING No.
A4-00045

EXECUTIVE MANAGER
INFRASTRUCTURE SERVICES
SIGNATURE DN FILE COPY
STUART HOLLEY

AMEND. B