



K:\Technical Services\Design\Project\Standard drawings\STANDARD UPDATES - PARKS\STANDARD DRAWINGS FOR FINAL REVIEW\A3-09714A.dwg

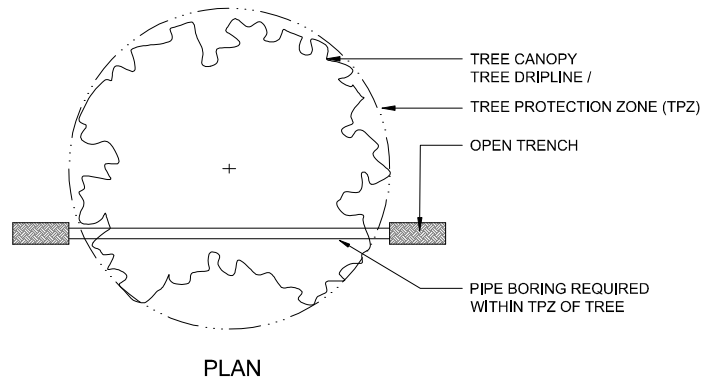

PLAN

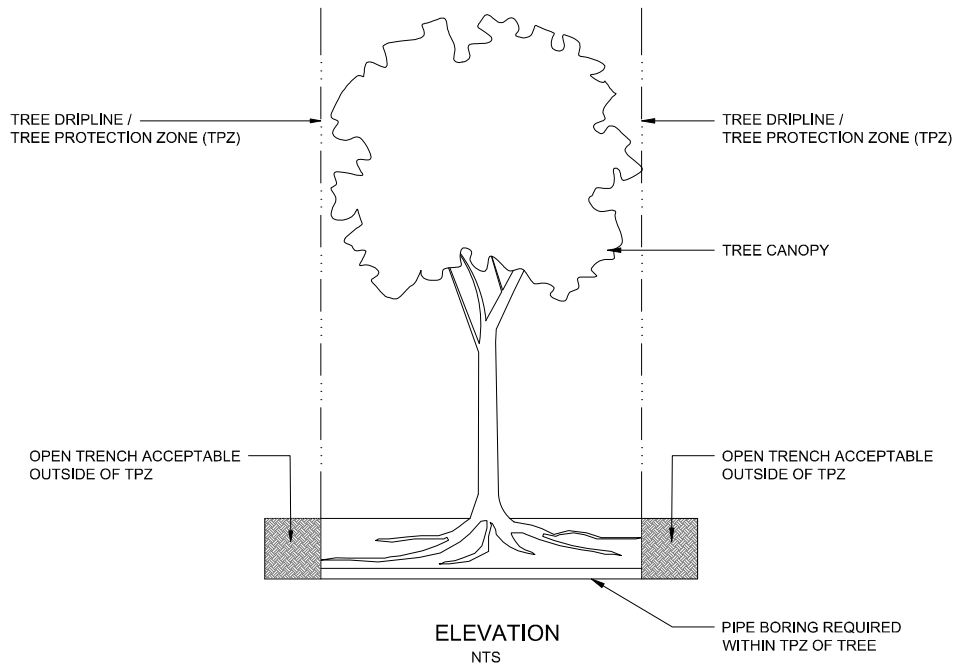

ELEVATION
NTS

NOTES:

1. TREE DRIPLINE / TREE PROTECTION ZONE (TPZ) IS TO BE ERRECTED AROUND THE DRIPLINE. INSTALLATION IS TO BE SIGNED OFF BY THE SITE SUPERINTENDANT PRIOR TO COMMENCING ANY WORKS.
2. TPZ IS MEASURED FROM THE CENTRE OF THE TRUNK AND FORMS RADIUS AROUND THE TREE. MULTI-TRUNKED TREES CAN BE CALCULATED USING THE GUIDELINES PROVIDED WITHIN APPENDIX A OF AS4970
3. NO EXCAVATION OR TRENCHING, STORAGE OF MATERIALS OR WASTE IS TO OCCUR WITHIN TPZ.
4. NO EXCAVATION IS TO BE CARRIED OUT INSIDE TPZ WITHOUT THE SITE SUPERINTENDANT'S WRITTEN APPROVAL. NO MECHANICAL EXCAVATION IS PERMITTED WITHIN TPZ - HAND EXCAVATE ONLY.
5. UNDERBORE DEPTH IS TO BE DETERMINED BY QUALIFIED ARBORISTS.
6. VISIBLE ROOTS EQUAL TO OR GREATER THAN 50mm THAT ARE CUT AND OR DAMAGED DURING WORKS MUST BE TREATED BY QUALIFIED ARBORIST APPROVED BY MRC. TREE ROOT/S TO BE TREATED IN A TIMELY MANNER.
7. WHEN WORKING AROUND TREES, TREE PROTECTION AND ITS ROOT SYSTEM IS A PARAMOUNT. PROVIDE PHYSICAL PROTECTION BARRIER AROUND OR ON TRUNK. BEST PRACTICE STANDARDS AND AS4970 (PROTECTION OF TREES ON DEVELOPMENT SITES) MUST BE ADHERED TO AT ALL TIMES.
8. ALL WORKS AROUND TREES SHOULD ADHERE TO ANY APPROVED PLANS PRODUCED BY A QUALIFIED LANDSCAPE PROFESSIONAL OR CERTIFIED ARBORIST.
9. REFER TO A3-09736 FOR TREE PROTECTION REQUIREMENTS.

		SURVEYED BY		DRAWN		SIGNED		DATE		ASSET OWNER	
		SURVEY FILE No		DESIGNED		SIGNED		DATE		Jason Cocker	
		LEVEL DATUM		CHECKED		SIGNED		DATE		Digitally signed by Jason Cocker Date: 2021.03.03 16:29:11 +10'00'	
A		09.2020		ORIGINAL ISSUE						JASON COCKER CERTIFIED	
NO.		DATE		DESCRIPTION		APPVD		HOR. DATUM / DATE		MANAGER / CO-ORDINATOR	
				AMENDMENTS AND REVISIONS				MGA 94/2020		DATE	



STANDARD

**INSTALLATION OF SERVICE TRENCH
ADJACENT TO A TREE**

SHEET 1 OF 2	
WORKS JOB No.	
DRAWING No. A3-09714	AMEND. A