

**INSTALLATION**

- REFER TO APPROVED PLANS FOR LOCATION, EXTENT, AND CONSTRUCTION DETAILS. IF THERE ARE QUESTIONS OR PROBLEMS WITH THE LOCATION, EXTENT, OR METHOD OF INSTALLATION, CONTACT THE ENGINEER OR RESPONSIBLE ON-SITE OFFICER FOR ASSISTANCE.
- ENSURE ALL NECESSARY SOIL TESTING (e.g. SOIL pH, NUTRIENT LEVELS) AND ANALYSIS HAS BEEN COMPLETED, AND REQUIRED SOIL ADJUSTMENTS PERFORMED PRIOR TO PLANTING.
- CLEAR THE LOCATION FOR THE CHANNEL, CLEARING ONLY WHAT IS NEEDED TO PROVIDE ACCESS FOR PERSONNEL AND CONSTRUCTION EQUIPMENT.
- REMOVE ROOTS, STUMPS, AND OTHER DEBRIS AND DISPOSE OF THEM PROPERLY. DO NOT USE DEBRIS TO BUILD ANY ASSOCIATED EMBANKMENTS.
- EXCAVATE THE DIVERSION CHANNEL TO THE SPECIFIED SHAPE, ELEVATION AND GRADIENT. THE SIDES OF THE CHANNEL SHOULD BE NO STEEPER THAN A 2:1 (H:V) IF CONSTRUCTED IN EARTH, UNLESS SPECIFICALLY DIRECTED WITHIN THE APPROVED PLANS.
- STABILISE THE CHANNEL AND BANKS IMMEDIATELY UNLESS IT WILL OPERATE FOR LESS THAN 30 DAYS. IN EITHER CASE, TEMPORARY EROSION PROTECTION (MATTING, ROCK, ETC.) WILL BE REQUIRED AS SPECIFIED WITHIN THE APPROVED PLANS OR AS DIRECTED.
- ENSURE THE CHANNEL DISCHARGES TO A STABLE AREA.

**ADDITIONAL REQUIREMENTS FOR TURF PLACEMENT:**

- TURF SHOULD BE USED WITHIN 12 HOURS OF DELIVERY; OTHERWISE ENSURE THE TURF IS STORED IN CONDITIONS APPROPRIATE FOR THE WEATHER CONDITIONS (e.g. A SHADED AREA).
- MOISTENING THE TURF AFTER IT IS UNROLLED WILL HELP MAINTAIN ITS VIABILITY.
- TURF SHOULD BE LAID ON A MINIMUM 75mm BED OF ADEQUATELY FERTILISED TOPSOIL. RAKE THE SOIL SURFACE TO BREAK THE CRUST JUST BEFORE LAYING THE TURF.
- DURING THE WARMER MONTHS, LIGHTLY IRRIGATE THE SOIL IMMEDIATELY BEFORE LAYING THE TURF.
- ENSURE THE TURF IS NOT LAID ON GRAVEL, HEAVILY COMPACTED SOILS, OR SOILS THAT HAVE BEEN RECENTLY TREATED WITH HERBICIDES.
- ENSURE THE TURF EXTENDS UP THE SIDES OF THE DRAIN AT LEAST 100mm ABOVE THE ELEVATION OF THE CHANNEL INVERT, OR AT LEAST TO A SUFFICIENT ELEVATION TO FULLY CONTAIN EXPECTED CHANNEL FLOW.
- ON CHANNEL GRADIENTS OF 3:1 (H:V) OR STEEPER, OR IN SITUATIONS WHERE HIGH FLOW VELOCITIES (i.e. VELOCITY >1.5m/s) ARE LIKELY WITHIN THE FIRST TWO WEEKS FOLLOWING PLACEMENT, SECURE THE INDIVIDUAL TURF STRIPS WITH WOODEN OR PLASTIC PEGS.

THE TURF AND THE SOIL SUCH THAT SEEPAGE FLOW BENEATH THE TURF IS AVOIDED.

- WATER UNTIL THE SOIL IS WET 100mm BELOW THE TURF. THEREAFTER, WATERING SHOULD BE SUFFICIENT TO MAINTAIN AND PROMOTE HEALTHY GROWTH


**MAINTENANCE**

- DURING THE SITE'S CONSTRUCTION PERIOD, INSPECT THE DIVERSION CHANNEL WEEKLY AND AFTER ANY INCREASE IN FLOWS WITHIN THE CHANNEL. REPAIR ANY SLUMPS, WHEEL TRACK DAMAGE OR LOSS OF FREEBOARD.
- ENSURE FILL MATERIAL OR SEDIMENT IS NOT PARTIALLY BLOCKING THE CHANNEL. WHERE NECESSARY, REMOVE ANY DEPOSITED MATERIAL TO ALLOW FREE DRAINAGE.

- DISPOSE OF ANY COLLECTED SEDIMENT OR FILL IN A MANNER THAT WILL NOT CREATE AN EROSION OR POLLUTION HAZARD.

**REMOVAL**

- WHEN THE CONSTRUCTION WORK ABOVE A TEMPORARY DIVERSION CHANNEL IS FINISHED AND THE AREA IS STABILISED, THE AREA SHOULD BE APPROPRIATELY REHABILITATED.
- DISPOSE OF ANY COLLECTED SEDIMENT OR FILL IN A MANNER THAT WILL NOT CREATE AN EROSION OR POLLUTION HAZARD.
- GRADE THE AREA AND SMOOTH IT OUT IN PREPARATION FOR STABILISATION.
- STABILISE THE AREAS SPECIFIED IN THE APPROVED PLAN.

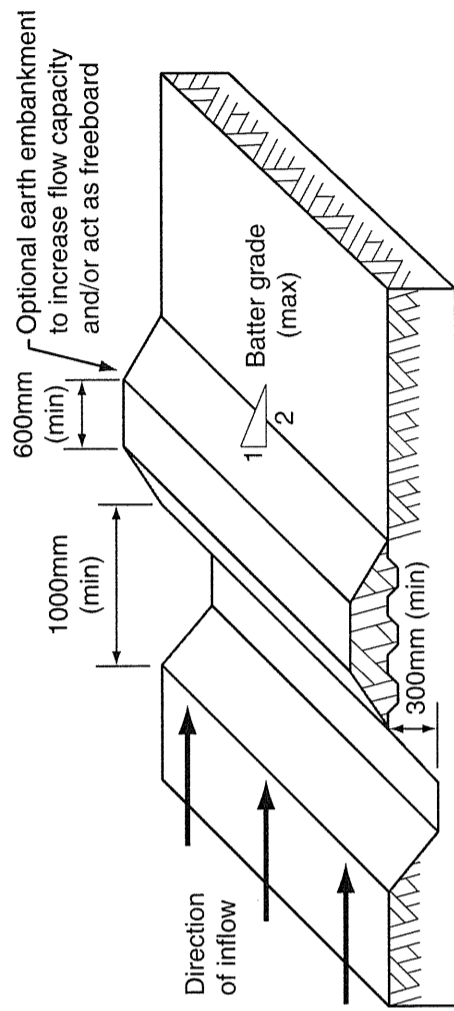

**Figure 1 - Typical profile of diversion channel with bank**

NO.	DATE	DESCRIPTION	APPVD
A	18/11/11	ISSUE FOR CONSTRUCTION	
AMENDMENTS AND REVISIONS			
FILE NAME DESIGN/DOCUMENTS/SEC STD DRAWINGS/...			

DRAWN	PO6	DRAWN	PO6
DESIGNED	PO6	CHECKED	PO6
MANAGER TECHNICAL SERVICES	G. Hawes	MANAGER TECHNICAL SERVICES	G. Hawes
MGA 55		MGA 55	

DATE	12/12/11
DATE	13.12.11
DIRECTOR ENGINEERING SERVICES	S.M. Holley
STUART HOLLEY RPEQ 8030	



**DIVERSION CHANNELS**

SHEET 1 OF 1
WORKS JOB No. -
DRAWING No. A3-6754
AMEND. A