

MATERIALS

FILTER TUBE: MANUFACTURED FROM A NON-WOVEN GEOTEXTILE REINFORCED WITH A UV-STABILISED, WOVEN FABRIC OR POLY-PROPYLENE MESH. THE GEOTEXTILE FABRIC SHOULD BE EITHER POLYESTER OR POLYPROPYLENE. PROPERTIES (AS3706) MINIMUM WIDE STRIP TENSILE STRENGTH OF 20kN/m IN BOTH DIRECTIONS; PORE SIZE EOS LESS THAN 160MICRONS, O95 LESS THAN 90MICRONS; MINIMUM MASS OF 300GSM (MINIMUM 'BIDIM' A44 OR EQUIVALENT).

RIBBED PIPE (USED WITH EARTH BANKS): RIBBED, PVC OR SIMILAR PIPE.

EARTH EMBANKMENT: NON-DISPERSIVE (EMERSON'S AGGREGATE CLASS 6, 7 OR 8) CLEAN EARTH FILL, FREE OF ORGANIC DEBRIS AND WITH SUFFICIENT CLAY CONTENT TO PREVENT THE THROUGH-FLOW OF WATER.

INSTALLATION

1. REFER TO APPROVED PLANS FOR LOCATION, EXTENT, AND DETAILS. IF THERE ARE QUESTIONS OR PROBLEMS WITH THE LOCATION, EXTENT, OR METHOD OF INSTALLATION CONTACT THE ENGINEER OR RESPONSIBLE ON-SITE OFFICER FOR ASSISTANCE.
2. CONSTRUCT A SUITABLE WATER-RETAINING DAM/TANK OUT OF THE MATERIAL SPECIFIED WITHIN THE APPROVED PLANS.
3. WHILE CONSTRUCTING THE DAM, INSTALL AND ANCHOR THE SPECIFIED NUMBER OF RIBBED PIPE SECTIONS THROUGH THE EMBANKMENT.
4. ENSURE THE INLETS TO EACH FILTER TUBE ARE SET AN APPROPRIATE HEIGHT ABOVE THE ADJACENT GROUND LEVEL


TO MINIMISE THE RISK OF SEDIMENT BLOCKAGE.

5. FOR EARTH EMBANKMENT, FIRMLY HAND-TAMP THE EARTH UNDER AND AROUND THE RIPPED PIPE/S IN LIFTS NOT EXCEEDING 100mm. ENSURE THAT ALL FILL MATERIAL IS WELL-COMPACTED.


6. SUITABLY CONNECT THE FILTER TUBES TO THE DOWNS-SLOPE END OF THE PROTRUDING CONNECTOR PIPES. ENSURE ALL CONNECTIONS ARE WATERTIGHT.

MAINTENANCE


1. INSPECT THE DAM/TANK AND FILTER TUBES REGULARLY AND AT LEAST DAILY DURING DE-WATERING OPERATIONS. MAKE REPAIRS AS NEEDED TO THE FABRIC.
 2. INSPECT THE FILTER TUBES FOR OBVIOUS LEAKS RESULTING FROM HOLES, TEARS OR JOINT FAILURE IN THE FABRIC.
 3. REPAIR OR REPLACE ANY FILTER TUBE AS NECESSARY TO MAINTAIN THE DESIRED OPERATIONAL PERFORMANCE. IN SOME CIRCUMSTANCES FLOW RATE THROUGH THE FILTER TUBES CAN BE TEMPORARILY IMPROVED BY BRUSHING THE BAG WITH A STIFF-BRISTLE BROOM.
 4. REPLACE ANY FILTER TUBE IF SEDIMENT BLOCKAGE OF THE FABRIC DECREASES THE FLOW RATE TO AN UNACCEPTABLE LEVEL, OR THE FILTER TUBE CONTAINS EXCESSIVE SEDIMENT.
- REMOVAL**
1. REMOVE OF ALL MATERIALS AND DISPOSE OF THEM IN A SUITABLE MANNER THAT WILL NOT CAUSE AN ONGOING EROSION OR POLLUTION HAZARD.

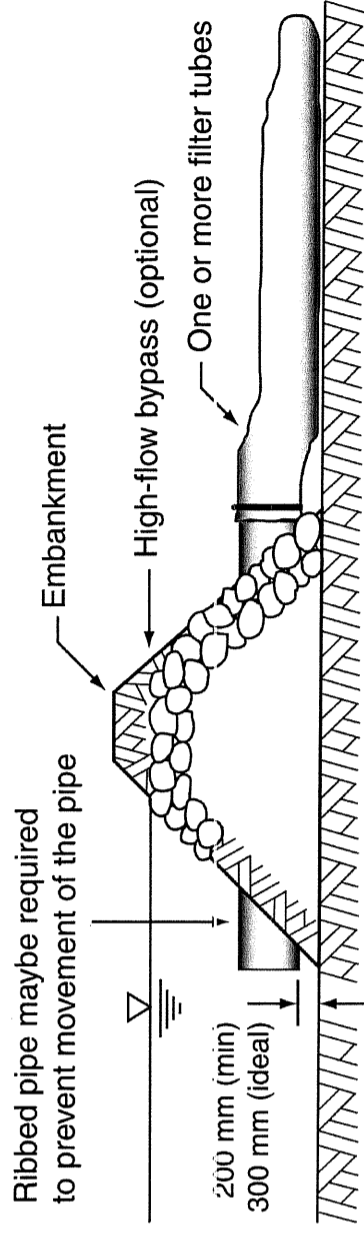

(a) Typical earth dam installation

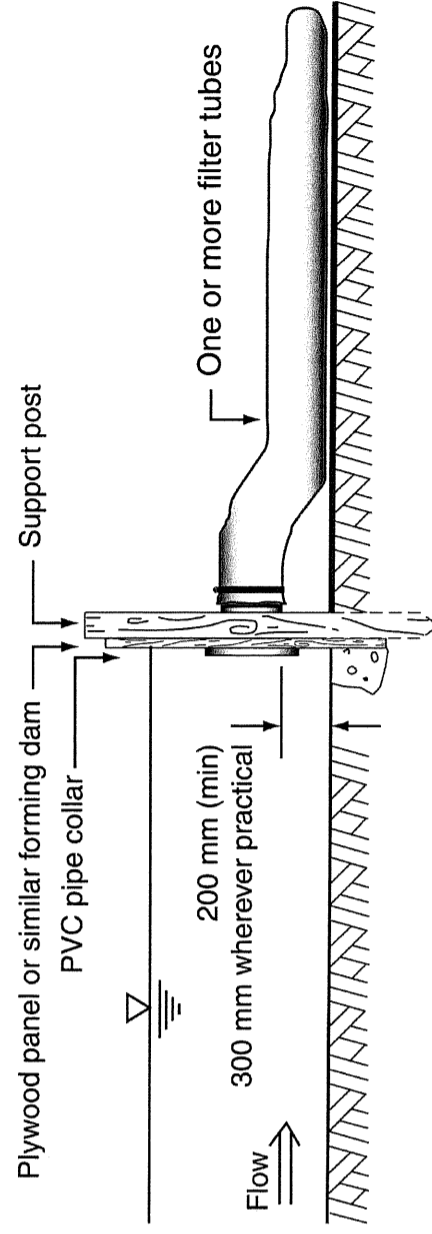

(b) Typical panel-type dam installation

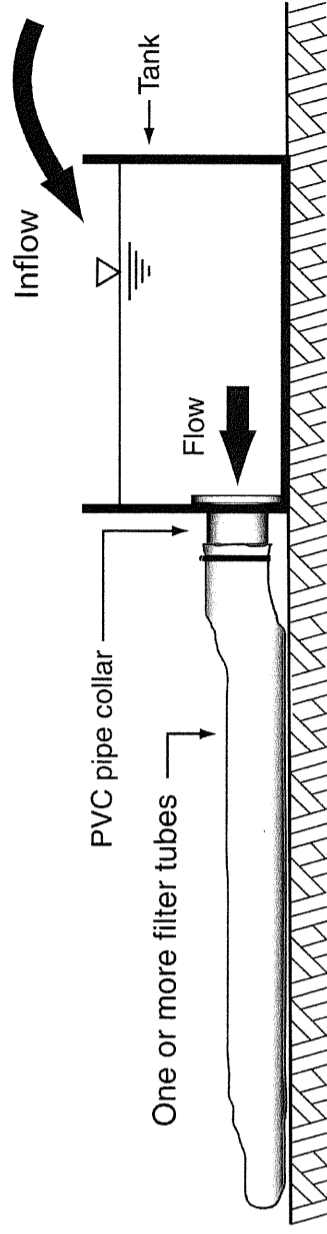

(c) Filter tubes connected to a distribution tank

FILE NAME	DESIGNDOCUMENTS\SEC STD DRAWINGS...		
AMENDMENTS AND REVISIONS			
NO.	DATE	DESCRIPTION	APPVD
A	18/11/11	ISSUE FOR CONSTRUCTION	
SURVEY		SURVEY FILE NO	
LEVEL DATUM		AHD	
MERIDIAN		MGA 55	
DRAWN		SIGNED	DATE
DESIGNED		SIGNED	DATE
CHECKED		SIGNED	DATE
MANAGER TECHNICAL SERVICES		DATE	
G. HAWES RPEQ 5693		12/2/11	

DIRECTOR ENGINEERING SERVICES
S.M. Hill
 STUART HOLLEY RPEQ 8824
 DATE 16.12.11



FILTER TUBE DAM (DE-WATERING)