




(d) Installation without backing support

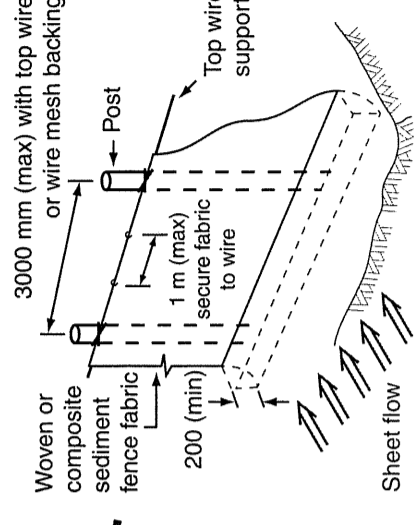


(h) Installation with top wire support

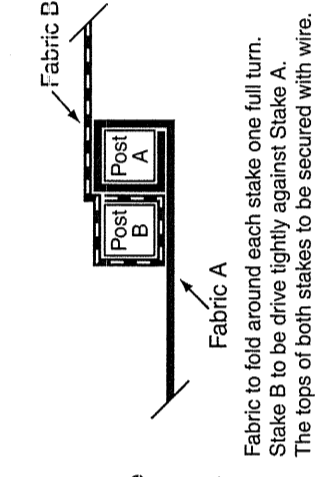


(c) Joining fabric - Method 1

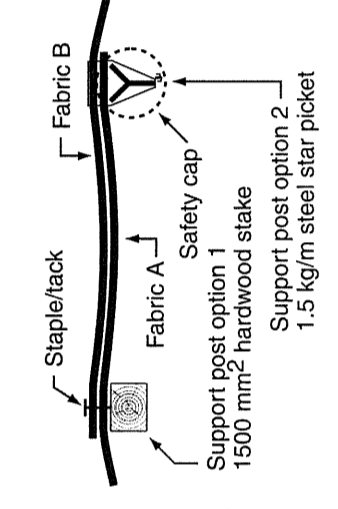


(g) Joining fabric - Method 2

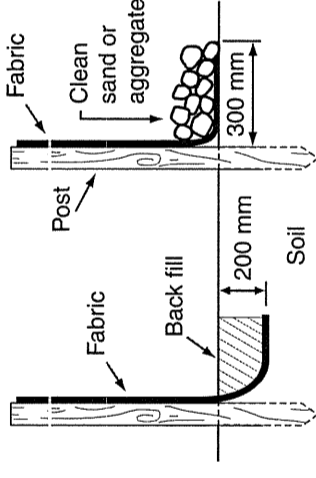


(b) Anchoring base of fabric

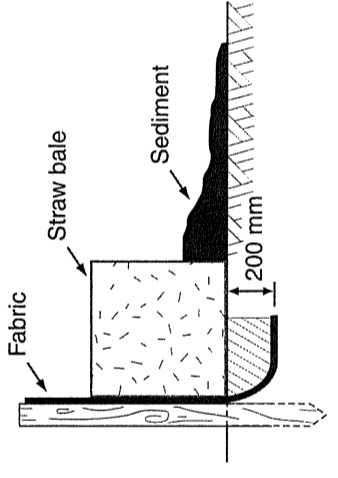


(f) Placement of up-slope straw bale

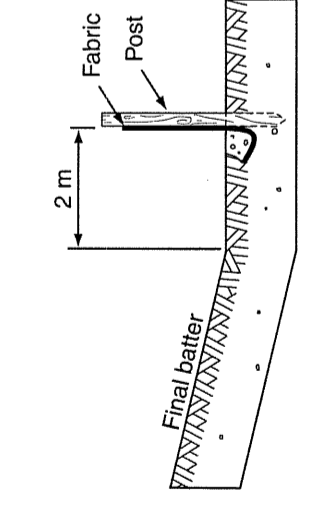

(a) Location of fence relative to base of slope

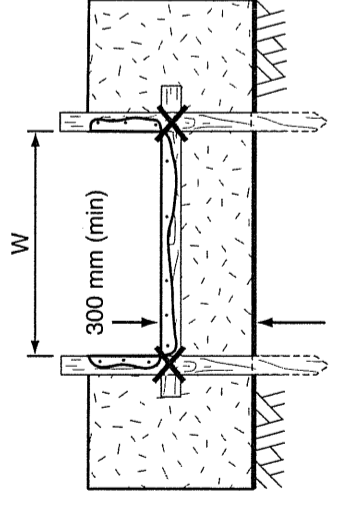

(e) Spill-through weir

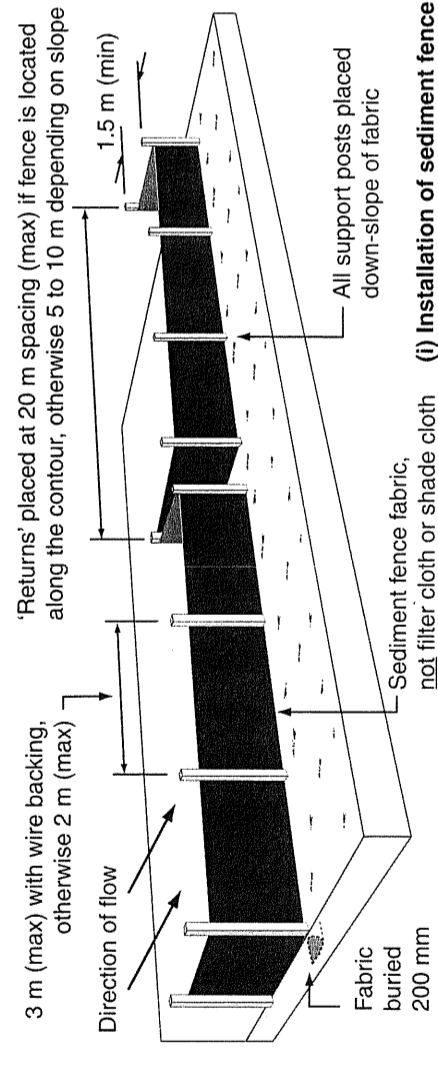

(i) Installation of sediment fence

Notes:

1. Sediment fence to be installed along a line of constant ground elevation wherever practical.
2. Both end of the sediment fence to extend up the slope at least 1m.
3. Support post to be spaced a maximum 2m unless the fence is supported by a top wire or wire mesh backing, in which case 3m maximum spacing.
4. Fence 'returns' shall be installed at maximum 20m spacing if fence is installed along the contour, otherwise 5 to 10m maximum spacing.
5. Minimum 4 staples or tie wires per stake.

SEDIMENT FENCE		SHEET 1 OF 1	
Mackay REGIONAL COUNCIL		WORKS JOB No. -	
DRAWING No. A3-6867		AMEND. A	
NO.	DATE	DESCRIPTION	APPVD
A	18/11/11	ISSUE FOR CONSTRUCTION	
AMENDMENTS AND REVISIONS			
FILE NAME DESIGNDOCUMENTS\SEC STD DRAWINGS\...			
SURVEY	SURVEY FILE NO	LEVEL DATUM	AHD
DESIGNED	CHECKED	MERIDIAN	MGA 55
DRAWN	SIGNED	MANAGER TECHNICAL SERVICES	
POC	POC	G. HAWES	RPEQ 5693
DATE	DATE	DATE	DATE
24/12/14	21/12/14	21-12-14	21-12-14
DIRECTOR ENGINEERING SERVICES		STUART HOLLEY RPEQ 8940	
SIGNED		SIGNED	
POC		POC	